

3/27/2013

[Dart Hawkesbury] Job Sheet - Gagnon-Donovan, Michelle



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200

D350-636-011
Job Sheet 175052

**Part No:** D350-636-011**Job Qty:** 1 ea**Part Name:** Skidtube LH, Std Wearplates, DART (Apical) Cylindrical/Aerazur Float Comp.**Part Weight:** 0 lbs**Status:** Scheduled**Priority:** Medium**Job Created:** 3/27/18**Job Tracking No:****Due Date:** 4/18/18**Created By:** Michelle Gagnon-Donovan**Type:** SOLD**Description:**

Note: D2750-041 REV G SHEETS 1,2,4,8 IPP Rev:I 02.09.25 IPP Rev:J 06-03-23 As per Rev D IPP Rev:K 06-07.13
As per dsi9343 IPP Rev:L 07-07-28 Added SS Wearplates(Rev E) JLM Ver:EC IPP Rev:M 08-04-22 DD
verified:EC IPP Rev:N 08-09-23 revF DD verified:ec IPP Rev:O 09-02-06 per PAR09-010 DD ver:EC IPP
Rev:P 10.06.22 revise seq110 DD ver:EC IPP Rev:Q 10.10.01 as per IIN revH DDver:EC IPP REV:R
13.08.27 PER ECN13-594 DD VERF:JLM

Ship Via:**Bill of Materials****Container No:** S061415**Part:** D350-636-011**Job No:** 175052**Serial No/Batch:** S061415**Revision:****Inspector:**

Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Date: 04/16/18

:24 AM Dart.Gagnon.Michelle

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		Sign-off
					Setup hrs	Run Hrs	Workcenter / Supplier	Lead Time	
90	Start up Operation	1 Ea		4/17/18	0.00	0.00	Start Up Skid tubes-1		
110	Skid tubes	1 pcs		4/17/18	0.00	4.55	Skid tubes-4		mbh
120	QC	1 pcs		4/17/18	0.00	0.00	QC10		38 DAS
130	QC	1 pcs		4/17/18	0.00	0.00	QC5		9-89 38
140	HandFinish	1 pcs		4/17/18	0.00	0.93	HandFinish1		Sit 18-04-24
150	QC	1 pcs		4/17/18	0.00	0.00	QC7-2		JTW
160	Skid tubes	1 pcs		4/17/18	0.00	4.55	Skid tubes-4		MLC 18-05-15 JTW
170	QC	1 pcs		4/17/18	0.00	0.00	QC10		38
180	QC	1 pcs		4/17/18	0.00	0.00	QC5		38
190	HandFinish	1 pcs		4/17/18	0.00	0.93	HandFinish2		SA 18-05-03
200	SprayPaint	1 Ea		4/17/18	0.00	0.91	Spray Paint		NIA
205	Outsource	1 pcs		4/17/18			ATE003-VC	39794	CY 18/05/04
210	QC	1 pcs		4/17/18	0.00	0.00	QC14		18-5-14
230	HandFinish	1 pcs		4/18/18	0.00	0.93	HandFinish4		18-5-23
240	QC	1 pcs		4/18/18	0.00	0.00	QC5		38
250	Packaging	1 pcs		4/18/18	0.00	0.00	Packaging1-3		MAY 28 2018
260	QC	1 pcs		4/18/18	0.00	0.00	QC4		JUN 05 2018
265	DC	1 pcs		4/18/18	0.00	0.00	DC		
270	Packaging	1 pcs		4/18/18	0.00	0.00	Packaging3-1		JUN 05 2018
280	QC21-FG	1 Ea		4/18/18	0.00	0.00	QC21		JUN 25 2018

Part Op 110 - 1- Pick D2600-3 Bent 2- Deburr FWD and AFT ends, remove bending marks. Scribe batch# inside AFT end per dwg
 Descriptions: D2750-1 3- Drill pilot holes for blade fitting bolt holes using DT8983. Start with 3/16", then open to 0.500" using center drill then ream holes using 0.500" reamer. PIN first side. Repeat process on second side. ***ENSURE PROPER POSITIONING FWD BEND MUST BE FACING UP WHEN DRILLING FIRST SIDE*** Drill pilot holes as per Dwg D2750 sheet 4 (D2750-1 details). Drill using drill Jig DT8150 & DT8863A for 2nd side only DT8863B for first side (detail B) 4- Locate DT8330 off of blade fitting bolt holes and drill pilot holes for blade fitting. Open to 0.500" using hole saw. VERIFY AND RECORD FWD BEND ANGLE. 5- Drill pilot holes for wearplates as per Dwg D2750 using DT8108 open to 0.297". 6- Open up holes of Detail A to 0.297" (total of 2 holes per side) 7- Weld D2744 Cap as per Dwg D2750 and QSI 004. Fill grooves in bend left from bending as per QSI 004 A/R Aluminum Rod batch: 038611 8- Grind welds flush as per Dwg D2750

160 - 1- Open up holes using hole saw of Detail C and ground handling to 0.625" (total of 8 holes per side) as per dwg D2750. 2- Open up holes using hole saw of Detail B to 0.750" (total of 4 holes per side) as per dwg D2750. 3- Open float hole using un-bit to 0.500" (4 per side) 4- Chamfer holes of Detail B, C, ground handling and float holes per dwg D2750 (welding instructions on sheet 8) 5- Deburr and blow out all chips from inside of tube 6- Prepare tube for welding, remove alodine as required. 7- Bond web D2739 in place as per QSI 015, let cure for 12hrs. A/R Sikaflex-291 batch: 138787 exp. date: 12-12-22 ***ATTN: USE I-BEAM LOCATION AID (BLADE FITTING)*** 8- Weld spacers D3490-1, D3490-3 and D2743 as per dwg D2750 & QSI004 (welding instructions on sheet 8) A/R Aluminum Rod batch: 038611 9- At section AJ-AJ drill out x-bolt spacer to 0.404" 10- Grind welds flush as per Dwg D2750 11- Spot face ground handling holes section (total of 4 places per side) as per dwg D2750 12- Deburr holes, ensure tube is free of all scratches before sending to paint.

180 - ***VERIFY C'BOARD IS GOOD***

190 - Re-alodine tube as per QSI 005 section 4.1.2.1 do not acid etch.

200 - 1- PRIME AS PER DWG AND QSI 005 4.2 PRIMER PRC DESOTO 515X349 BATCH: _____ 2- PAINT WHITE AS PER DWG AND QSI 005 4.2 PAINT BATCH: _____

210 - Inspect for foreign object per QSI 024

230 - 1- Install inserts as per Dwg D2750 2- Inspect for Foreign Objects 3- Install blade fitting D3488-041, wearshoes and ground handling hardware as per dwg D2750 SIKAFLEX 241 BATCH: M138787 EXP DATE: 12/12/22 4- Assemble o-ring to plug as per dwg D3492 and apply o-ring lube A/R 55-o-ring lube batch: M138842 5- Coat all exposed fasteners with "LPS Procyon" batch: M130640

260 - *****ensure antiseize is on AN8C21A bolts*****

265 - record fwd angle: 89.9 Photocopy blue file and type labels per PPP D350-636-011 CHG 007

270 - Package as per PPP D350-636-011 Location : FG072

003364

Job BOM

Part / Item	Component Name	Quantity	Operation	Container
D2600-3-BENT-LH	Extrusion Bent LH	1 Ea (1 ea)	90-Start up Operation	5043955
D2744	Cap	1 Ea (1 ea)	90-Start up Operation	5038835
D2739	350 I-Beam	1 Ea (1 ea)	160-Skidtubes	5032813
D2743	Crossbolt Spacer	8 Ea (8 ea)	160-Skidtubes	5051803
D3490-1	Cross Bolt Spacer	4 Ea (4 ea)	160-Skidtubes	5039269
D3490-3	Cross Bolt Spacer	4 Ea (4 ea)	160-Skidtubes	5066234
AN3C5A	Bolt	34 Ea (34 ea)	230-HandFinish	5057153
AN3C6A	Bolt	4 Ea (4 ea)	230-HandFinish	5019397
AN6C44A	Bolt	4 Ea (4 ea)	230-HandFinish	FM137055
AN8C35A	Bolt	1 Ea (1 ea)	230-HandFinish	FM137203
D2745	Bushing	8 Ea (8 ea)	230-HandFinish	5053257
* D3488-041 5070838	Blade Fitting LH	1 Ea (1 ea)	230-HandFinish	* 5070838
D3492-1	Plug	8 Ea (8 ea)	230-HandFinish	5052900
D3492-3	Plug	8 Ea (8 ea)	230-HandFinish	5067012
D3535-25	Wearplate Center	1 Ea (1 ea)	230-HandFinish	5060749
D3536-25	Gasket Center	1 Ea (1 ea)	230-HandFinish	5059811
D3537-1	Wearpad	3 Ea (3 ea)	230-HandFinish	5058407
D3631-1	Washer	8 Ea (8 ea)	230-HandFinish	5059544
D3791-1	Wearpad	1 Ea (1 ea)	230-HandFinish	* 5070803
* D3793-1	Wearplate Fwd	1 Ea (1 ea)	230-HandFinish	5047232
D3793-3	Wearplate Aft	1 Ea (1 ea)	230-HandFinish	5059819
D3794-1	Gasket Fwd	1 Ea (1 ea)	230-HandFinish	5046513
D3794-3	Gasket Aft	1 Ea (1 ea)	230-HandFinish	5053037
MS21043-6	Nut	4 Ea (4 ea)	230-HandFinish	5034401
MS21083C8	Nut	1 Ea (1 ea)	230-HandFinish	5044736
NAS1149C0332R	Washer	38 Ea (38 ea)	230-HandFinish	M138409-124
NAS1149C0832R	Washer	1 Ea (1 ea)	230-HandFinish	5036714
NAS1515H3L	Washer	4 Ea (4 ea)	230-HandFinish	5072098
NAS1611-010	O-Ring	8 Ea (8 ea)	230-HandFinish	5037467
NAS1611-013	O-Ring	8 Ea (8 ea)	230-HandFinish	5058138
ALS4-1032-225	Rivnut	38 Ea (38 ea)	230-HandFinish	
AN8C21A	Bolt	2 Ea (2 ea)	250-Packaging	FM137162
D2741	Replacement Blade	1 Ea (1 ea)	250-Packaging	5040883
D3493-1	Washer	2 Ea (2 ea)	250-Packaging	5052854
D3532-1	Spacer	2 Ea (2 ea)	250-Packaging	5040492
MS21083C8	Nut	2 Ea (2 ea)	250-Packaging	5050046
NAS1149D0863J	Washer	2 Ea (2 ea)	250-Packaging	F125635

Job Allocations				
Operation	Component Part	Required	Inventory	Allocated
90-Start up Operation	D2600-3-BENT-LH	1	11	0
	D2744	1	15	0
160-Skidtubes	D2739	1	25	0
	D2743	8	201	0
	D3490-1	4	64	0
	D3490-3	4	47	0
	ALS4-1032-225	38	1,026	0
230-HandFinish	AN3C5A	34	87	0
	AN3C6A	4	318	0
	AN6C44A	4	395	0
	AN8C35A	1	60	0
	D2745	8	201	0
	D3488-041	1	7	0
	D3492-1	8	187	0
	D3492-3	8	109	0
	D3535-25	1	17	0
	D3536-25	1	27	0
	D3537-1	3	144	0
	D3631-1	8	35	0
	D3791-1	1	13	0
	D3793-1	1	17	0
	D3793-3	1	25	0
	D3794-1	1	10	0
	D3794-3	1	38	0
	MS21043-6	4	170	0
	MS21083C8	1	166	0
	NAS1149C0332R	38	4,644	0
	NAS1149C0832R	1	85	0
	NAS1515H3L	4	243	0
	NAS1611-010	8	365	0
	NAS1611-013	8	261	0
250-Packaging	AN8C21A	2	141	0
	D2741	1	65	0
	D3493-1	2	60	0
	D3532-1	2	38	0
	MS21083C8	2	166	0
	NAS1149D0863J	2	147	0
Part Specifications				
Specifications could not be found.				

Plex 3/27/18 9:24 AM Dart.Gagnon.Michelle

QTY -041	QTY -042	QTY -043	QTY -044	PART NUMBER	DESCRIPTION
X				D2750-041	350 SKIDTUBE ASSEMBLY, LH
	X			D2750-042	350 SKIDTUBE ASSEMBLY, RH
		X		D2750-043	350 SKIDTUBE ASSEMBLY, LH
			X	D2750-044	350 SKIDTUBE ASSEMBLY, RH
1	1	1	1	D2739	WEB
8	8	8	8	D2743	SPACER
1	1	1	1	D2744	CAP
8	8	8	8	D2745	BUSHING
1				D2750-1	SKIDTUBE WELDMENT, LH
	1			D2750-2	SKIDTUBE WELDMENT, RH
		1		D2750-3	SKIDTUBE WELDMENT, LH
			1	D2750-4	SKIDTUBE WELDMENT, RH
1		1		D3488-041	BLADE FITTING, LH
	1			D3488-042	BLADE FITTING, RH
4	4	4	4	D3490-1	SPACER
4	4			D3490-3	SPACER
		4	4	D3490-5	SPACER
8	8	8	8	D3492-041	PLUG ASSEMBLY
8	8			D3492-043	PLUG ASSEMBLY
		8	8	D3492-045	PLUG ASSEMBLY
1	1	1	1	D3535-25	WEARSHOE
1	1	1	1	D3536-25	GASKET
3	3	3	3	D3537-1	WEARPAD
8	8	8	8	D3631-1	WASHER
1	1	1	1	D3791-1	WEARPLATE
1	1	1	1	D3793-1	WEARSHOE
1	1	1	1	D3793-3	WEARSHOE
1	1	1	1	D3794-1	GASKET
1	1	1	1	D3794-3	GASKET
38	38	38	38	ALS4-1032-225	INSERT (OR ALS7-1032-225, AKS4-1032-225, AELS-1032-225)
34	34	34	34	AN3C5A	BOLT
4	4	4	4	AN3C6A	BOLT
4	4	4	4	AN8C44A	BOLT
1	1	1	1	AN8C35A	BOLT
38	38	38	38	AN960C10L	WASHER
1	1	1	1	AN960C816L	WASHER
4	4	4	4	MS21043-6	NUT
1	1	1	1	MS21083C8	NUT
4	4	4	4	NAS1515H3L	WASHER

GENERAL NOTES:

- MATERIAL: MAKE D2750-1/-2/-3/-4 FROM D2600-3 EXTRUSION (INITIAL LENGTH = 120.0).
- FINISH: ACID ETCH, ALODINE ASSEMBLY PER DART QSI 005 4.1 PRIOR TO INSTALLING D2739 WEB.
STANDARD: PRIME (REF. 4.2.1.3.3) AND PAINT WHITE PER DART QSI 005 4.2
OPTIONAL: POWDER COAT WHITE (REF. 4.3.5.1) PER DART QSI 005 4.3
BLACK ANTI-SKID PAINT AS INDICATED TO 1.0 ABOVE SKIDTUBE CENTER-LINE PER DART 005 4.4 (OPTIONAL).
- TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- UNITS: INCHES UNLESS OTHERWISE NOTED
- BREAK SHARP EDGES: N/A
- IDENTIFICATION: N/A
- WEIGHT: D2750-041/-042/-043/-044 = 26.5 LBS
- WELD PER DART QSI 004
- INSTALL ALS4-1032-225 INSERTS AFTER FINISH AS INDICATED. DRILL "F" SIZE HOLES ($\phi 0.297$) FOR WEARSHOE INSERTS
- FINAL CONFIGURATION SHOULD HAVE THE FOLLOWING MINIMUM MECHANICAL PROPERTIES:
MINIMUM YIELD TENSILE STRENGTH = 35 KSI
MINIMUM ULTIMATE TENSILE STRENGTH = 38 KSI
- COAT ALL EXPOSED FASTENERS WITH LPS LABORATORIES "LPS PROCYON" AFTER FINAL ASSEMBLY, CLEAN EXCESS OFF
FINISH WITH MEK DEGREASER.
- SPACER AND PLUG INSTALLED SAME AS SECTION AJ-AJ EXCEPT HORIZONTAL
- SPACER AND PLUG INSTALLED SAME AS SECTION AP-AP EXCEPT HORIZONTAL

SHOP COPY

RETURN TO
ENGINEERING
UNCONTROLLED COPY
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK ORDER
NO. 175052


MAR 27 2018

RELEASED
2013-08-13


G	CORRECTED TOLERANCE ON $\phi 0.500$ THRU HOLE: IS $+0.010/-0.000$, WAS $+0.100/-0.000$ (ZN B3-4, B2-5); ADD VIEW TO CONTROL FWD BEND ORIENTATION (ZN D-1, -4, -5, -7); UPDATED FINISH OPTIONS; INSIDE OF TUBE NO LONGER SPRAYED WITH LPS-3. REASON: PARTS-276 AND NCR13-2757	MB	13.07.11
F	INCORPORATE DSI 9413: QTY (3) D3537-1 WAS QTY (5) (ZN C8-1); D3791-1/-3 REPLACES D3535-13/-38 (ZN C8-1); D3794-1/-3 REPLACES D3536-13/-38 (ZN B8-1); ADD D3791-1 (ZN C8-1); WEARSHOE HOLES UNDER FWD/FT SADDLE REMOVED (8 PL). WEARSHOE HARDWARE QTY UPDATED (ZN B8-1); D3488-041/-042 HARDWARE UPDATED (ZN C1-8, 9, 10, 11); ADD NOTE 12 AND 13 (ZN A6-1); REASON: REF. NCR 08-043	PH	08.07.16
E	CHANGE TO STAINLESS STEEL WEARPLATES; ADD RUBBER GASKETS; CHANGE INSERTS; ADD D3631-1; REMOVE QTY (38) NAS1515H3L; REMOVE QTY (10) NAS1515H3L; REMOVE D2741; QTY (2) AN960C816; REMOVE QTY (2) MS21083C8	CB	07.05.17
D	ADD HOLES AND SPACERS FOR APICAL FLOATS; INCORPORATE DEO 91339157	PH	08.01.05
C	ADD D2750-3/D2750-4; INCORPORATE D2739 AND D2740	CP	08.11.18
B	CHANGE MS24694-S293 TO AN8-16A	CP	08.09.01
A	NEW ISSUE	DS	08.04.16
REV.	DESCRIPTION	BY	DATE
DESIGN	MM	DART AEROSPACE USA, INC.	
DRAWN	B	KENT, WA	
CHECKED	JP	DRAWING NO.	REV. G
MFG. APPR.	JP	D2750	SHEET 1 OF 11
APPROVED	JP	TITLE	SCALE
DE APPR.	JP	350 SKIDTUBE ASSEMBLY	NTS
DATE	13.07.11	COPYRIGHT © 1996 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS UNCLASSIFIED AND CONTAINS NO INFORMATION OF THE SPECIAL CATEGORY THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

DESIGN	MJM	DATE	13.07.11
DRAWN		DE APPR.	
CHECKED		APPROVED	
MFG. APPR.		TITLE	360 SKIDTUBE ASSEMBLY
DRAWING NO.	D2750	SCALE	NTS
REV. G		SHEET 2 OF 11	
DART AEROSPACE USA, INC.			


D2750-042 360 SKIDTUBE ASSEMBLY, RH

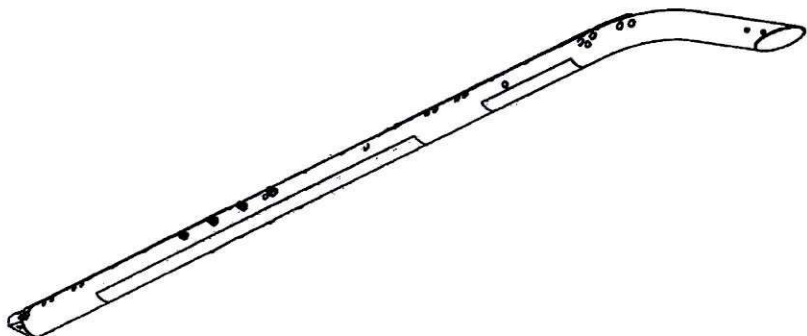


D2750-041 360 SKIDTUBE ASSEMBLY, LH

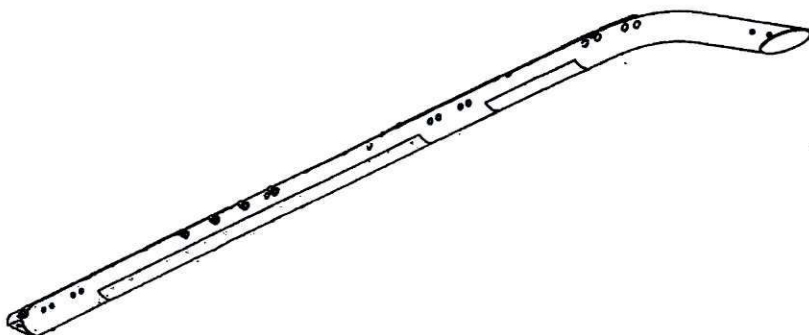


RELEASED
2013-08-13
MD

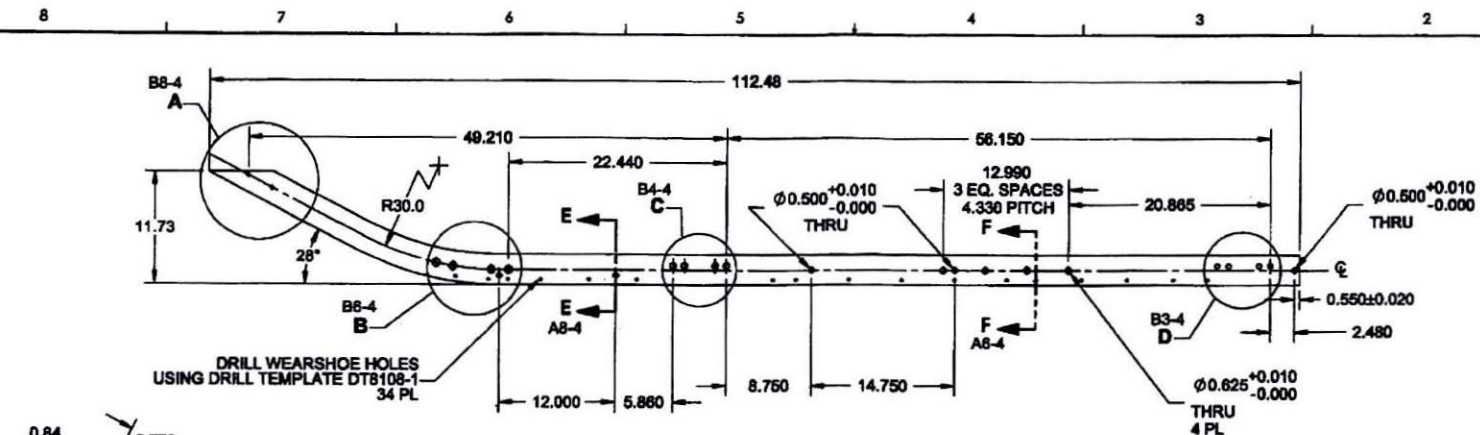


D2750-1 LH SKIDTUBE




DETAIL A
SCALE 2X

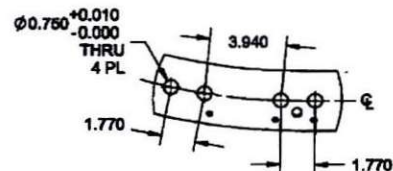


DETAIL B
SCALE 2X




DETAIL C
SCALE 2X




DETAIL D
SCALE 2X




SECTION E-E
SCALE 3X, 2 PL



SECTION F-F
SCALE 3X, 17 PL




SECTION G-G
SCALE 3X, 4 PL



SECTION H-H
SCALE 3X, 4 PL

RELEASED
2013-08-13

DESIGN	MM	DART AEROSPACE USA, INC.
DRAWN		KENT, WA
CHECKED		DRAWING NO. D2750
MFG. APPR.		REV. G
APPROVED		SHEET 4 OF 11
DE APPR.		TITLE 350 SKIDTUBE ASSEMBLY
DATE	13.07.11	SCALE NTS

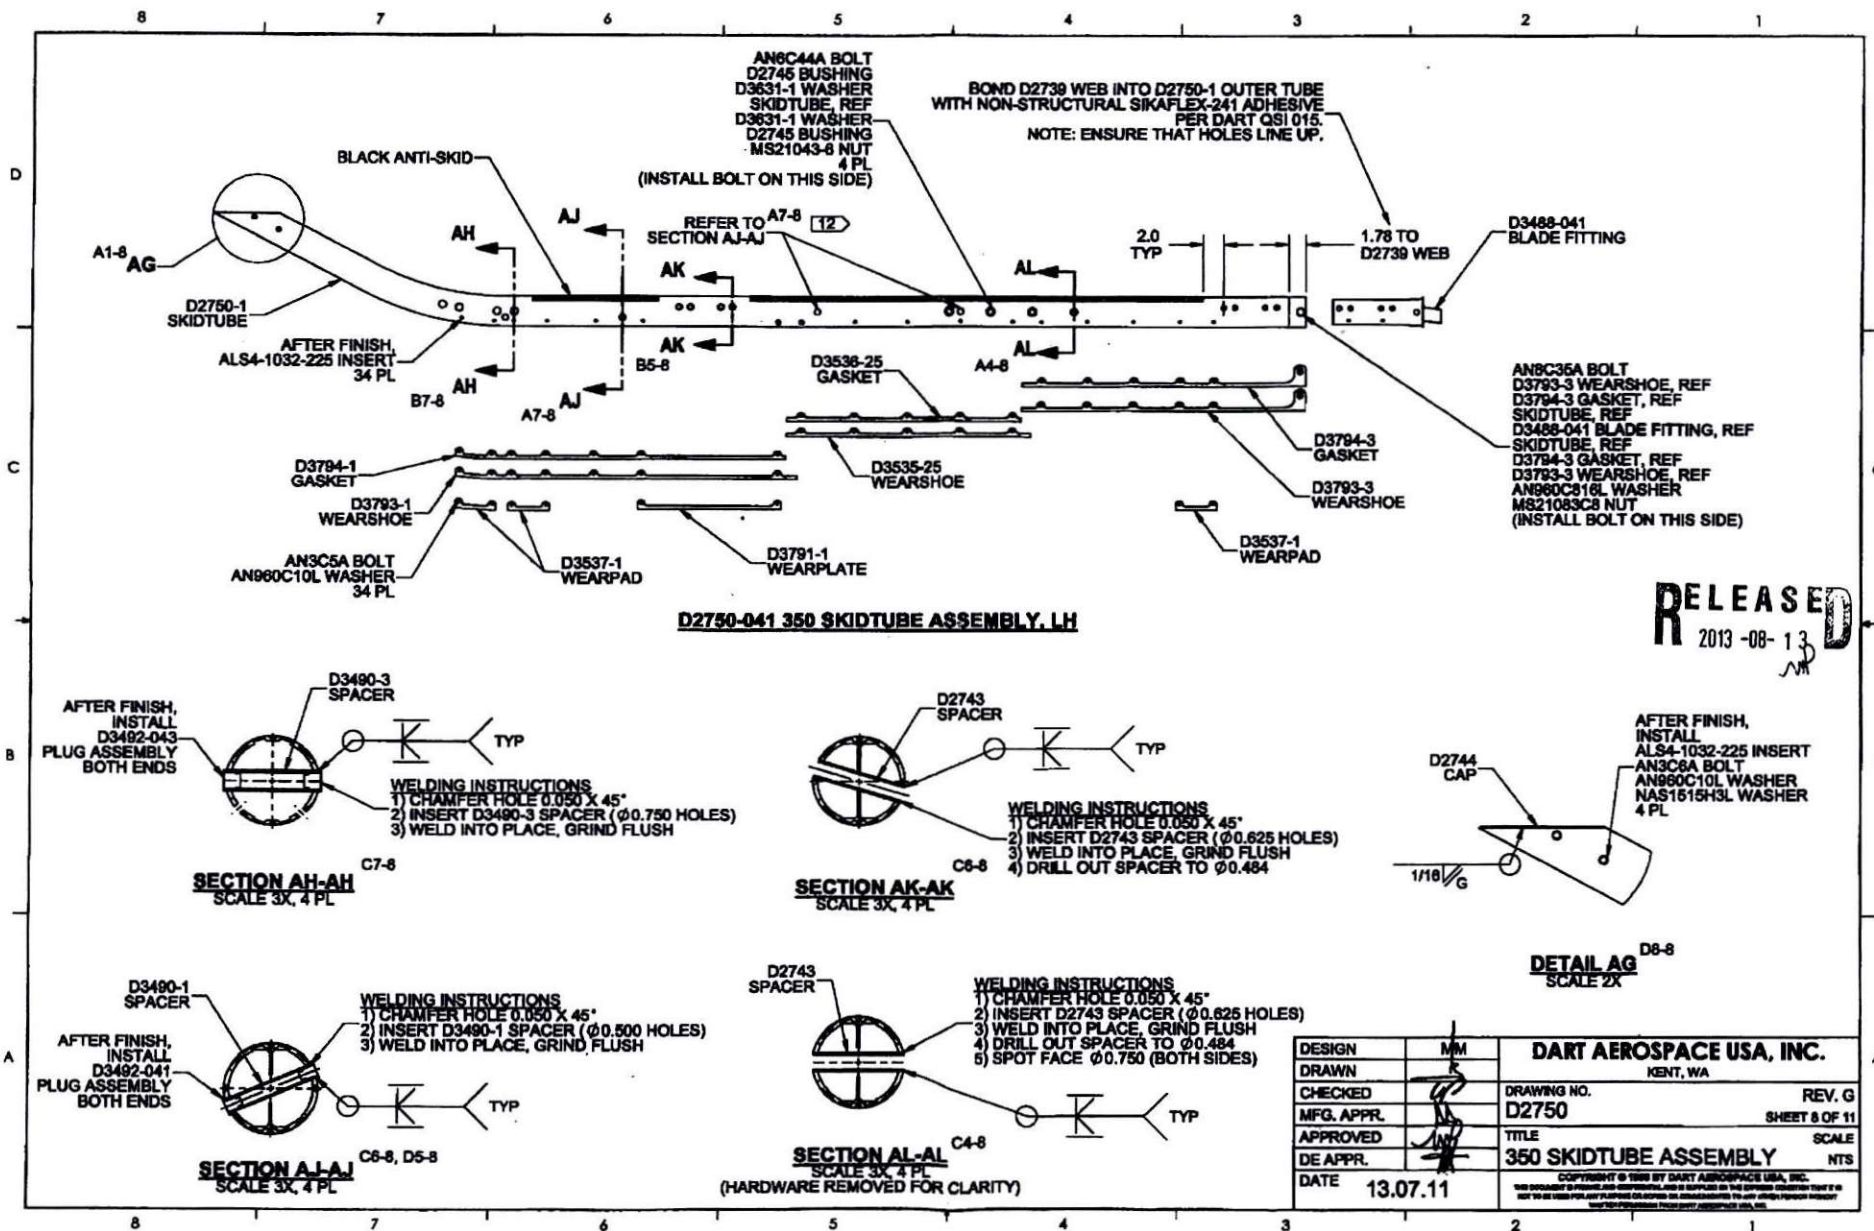

RELEASED
2013-08-13



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200

PURCHASE ORDER **PO039794**

Supplier: ATE003-VC
Atelier Debosselage
358 Principale
Calumet
QC
J0V 1B0 Canada
Phone: 819 242 5633

PO No: PO039794
PO Date: 5/4/18
Due Date: 5/7/18
Purchase Order Revision:
Revision Date:
Ship-To Contact: Lavoie, Chantal
Phone: clavoie@dartaero.com

Ship To: 1270 Aberdeen Street
Hawkesbury
ON
K6A 1K7 Canada
Phone: 613-632-5200

Via: Ground
Pymt Terms: Net 30
Freight Terms:
Special Comments:

Items

Line Item	Job	Part	Description	Status	Due Date	Order Quantity	Received Quantity	Balance	Unit Price (CAD)	Extended Price
1	175051	D350-636-011	Skidtube LH, Std Wearplates, DART (Apical) Cylindrical/Aerazur Float Comp.	Firmed	5/7/18	1 pcs	0 pcs	1 pcs	\$225.00/pcs	\$225.00
	175052			Firmed	5/7/18	1 pcs	1/0 pcs	1 pcs	\$225.00/pcs	\$225.00
Sub Total:						2	0	2		\$450.00
2	175054	D350-636-012	Skidtube RH, Std Wearplates, DART (Apical) Cylindrical/Aerazur Float Comp.	Firmed	5/7/18	1 pcs	0 pcs	1 pcs	\$250.00/pcs	\$250.00
	175060			Firmed	5/7/18	1 pcs	1/0 pcs	1 pcs	\$250.00/pcs	\$250.00
Sub Total:						2	0	2		\$500.00
3	175817	D135-751-011	Skidtube with Standard Wearplates Fits LH or RH	Firmed	5/7/18	1 pcs	0 pcs	1 pcs	\$225.00/pcs	\$225.00
	175818			Firmed	5/7/18	1 pcs	1/0 pcs	1 pcs	\$225.00/pcs	\$225.00
Sub Total:						2	0	2		\$450.00
4	175481	D3391-023	Mid Tube Assembly	Firmed	5/7/18	1 pcs	0 pcs	1 pcs	\$0.00/pcs	\$0.00
Line Item Note RE-WORK <i>see PO039793</i>										
Grand Total:										\$1,400.00

Order Notes

Terms & Condition of Purchasing(Suppliers) and Procurement Quality Clauses are an integral part of our AS9100 requirements. To learn in detail, please visit www.dartaerospace.com for further explanation.

DART
a e r o s p a c e

1270 ABERDEEN ST.
HAWKESBURY ON, CANADA K6A 1K7
TEL : 1-613-632-5200 www.dartaero.com

PATENT	US #5735484 / CA #2222184 / EURO #0828655		
P/N	D350-636-011	CHG	CHG007
DESC.	Skidtube LH	STC	SH99-7
LOT	S061415	STC	SR00646SE
MODEL	AS350/355	STC	

TC APPROVAL # 09-89

MADE IN CANADA

D2729-4



Dart Aerospace Ltd.

1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200

SKIDTUBE LH

P/N: D350-636-011

CHG007

S/N: S061415

Kim Johnston

From: Sonia Quirion
Sent: Monday, May 28, 2018 7:00 AM
To: Kim Johnston; Michelle GagnonDonovan
Subject: p/w

good mornig

d206-781-063 x8

647.7304

d412-704-011 s074640 x1 only l/b

dsi 9464-011 s074715 x1 only l/l/b

d350-636-012 s052850 s062458 red and white

d350-636-011 s061415

Change Record

PAGE 1 OF 1

Part Number: D350-636-011/-011GB/-012/-012GB

Description: SKIDTUBE STD LH/RH, FLOAT COMPATIBLE

[illegible]